


17R Technische informatie
17R Technische Data
17R Information technique
17R Technical information



17R Technische informatie
17R Technische Data
17R Information technique
17R Technical information

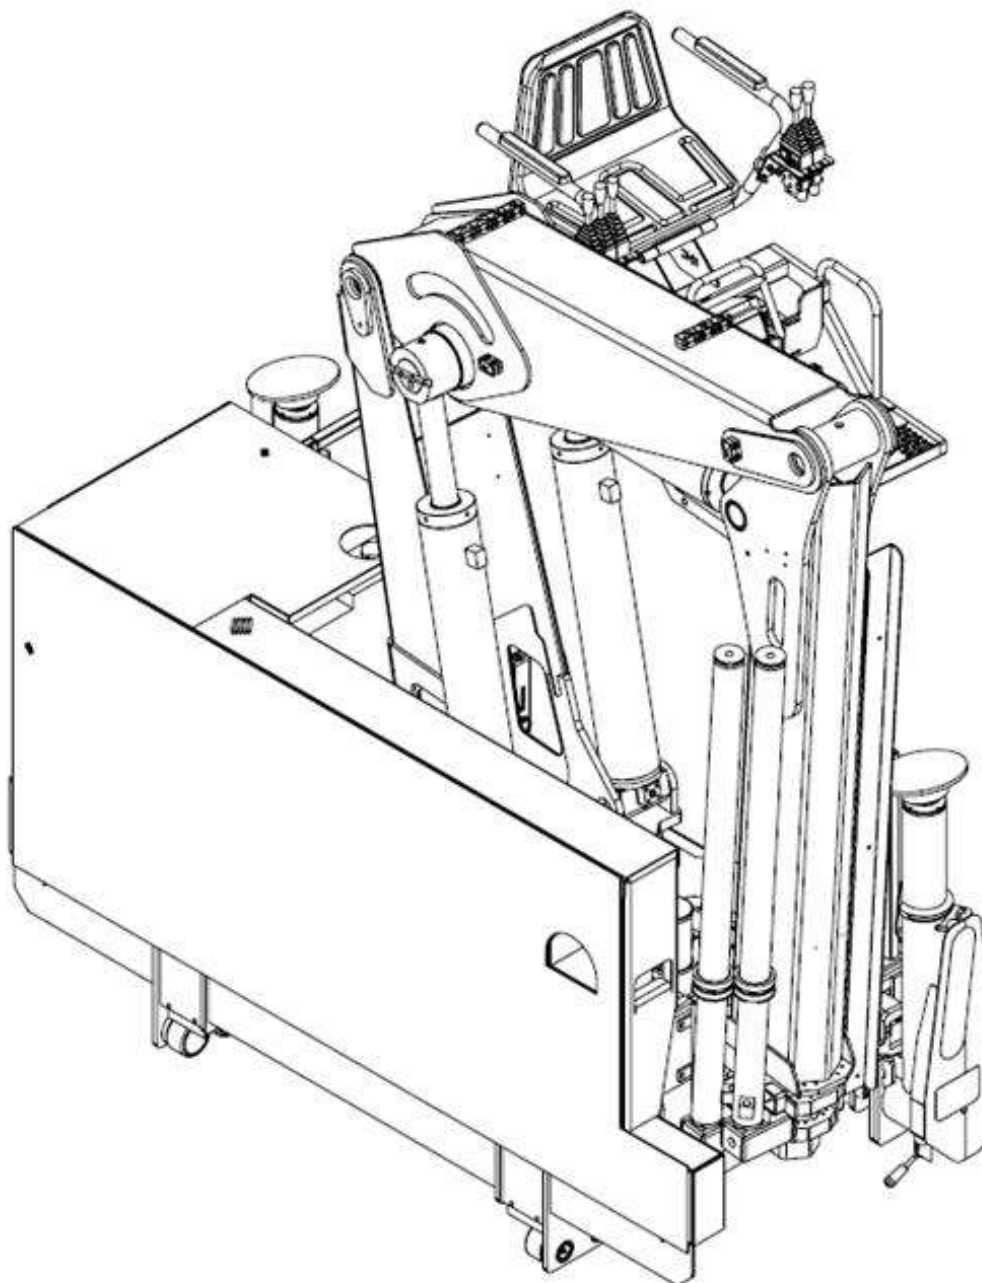

		KCS 17R-2X	KCS 17R-3X	KCS 17R-4X			
Kraangroep / Krangruppe / Groupe / Loading Group	H1B3						
Capaciteit / Kapazität / Capacité / Capacity		17,3 tm	17 tm	16,0 tm			
Hydr. bereik / hydr. Bereich / Longueur hydr./ hydraulic reach		6,20 mtr	7,30 mtr	8,60 mtr			
Zwenkbereik / Slewing area / Schwenkbereich/ Rotation	Continue						
Opvouwbaar/ Faltbar / Repliable / Foldable		V	V	V			
Kraanspoor / Kranspur / Carriage / Track (1)	1.300 mm (1)						
Flensdikte / Obengurtdicke / Hauteur du rail / Rail thickness	20 mm						
Motor / Motor / Moteur / Engine	Hatz 3H50TICD Stage V						
Olietank / Öltank / Reservoir d'huile / Oil tank	110 ltr						
Dieseltank / Dieseltank / Reservoir gazoil/ Fuel tank	55 ltr						
Lengte / Länge / Longueur / Length (2)	1000 mm						
Hoogte / Höhe / Hauteur / Height (3)		2490 mm	2460 mm	2560 mm			
Afstempelbasis / Abstütz breite / Base de stabilisation / Stabilizer spread	2750 – 4750						
Gewicht / Gewicht / Poids / Weight (4) ± 3%		3.350 kg	3550 kg	3700 kg			




Afmetingen en gewichten onder voorbehoud / Abmessungen und Gewichten vorbehalten / Dimensions et poids sont sujet à changement / Dimensions and weights subject to changes

1. Ander spoor op aanvraag / Anderes Spur auf Anfrage / Autre carriage sur demande / Other track on request
2. Spoor 2250 – 2420 afwijkend / Spur 2250 -2420 abweichend / Carriage 2250 -2420 different / Track 2250 -2420 deviating
3. Gemeten vanaf laadvloer (opgevouwen) / Gemessen vom Boden (falten) / Mesuree à partir du plancher (replier) / Measured from the floor (folded)
4. Inclusief steunpoten / einschliesslich Stützbeinen / Stabilisateur inclus / inclusive stabilizers

17R Technische informatie
 17R Technische Data
 17R Information technique
 17R Technical information



Giek variaties / Arm Varianten / Boom variation / Boom variations

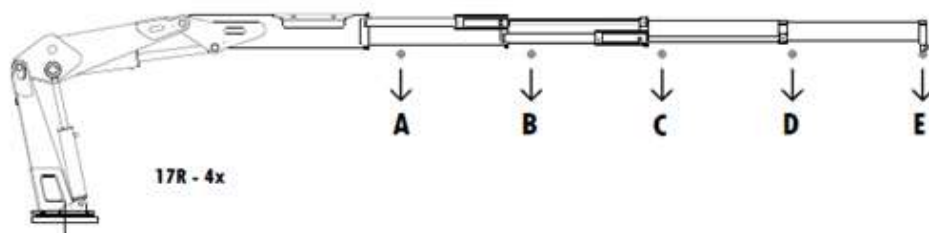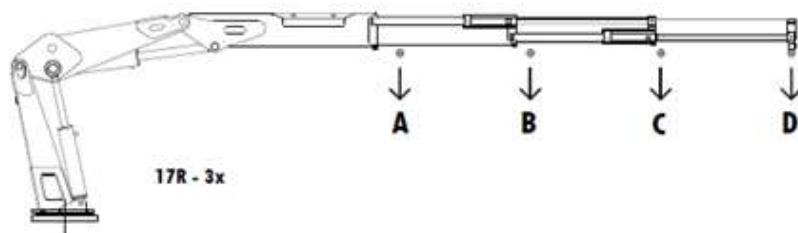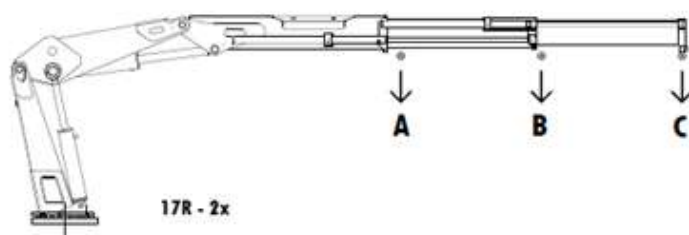


Type	A	B	C	D	E
KCS 17R-2X	3,4 mtr 5100 kg	4,8 mtr 3450 kg	6,2 mtr 2500 kg		
KCS 17R-3X	3,4 mtr 5000 kg	4,7 mtr 3400 kg	6 mtr 2575 kg	7,3 mtr 2075 kg	
KCS 17R-4X	3,4 mtr 4715 kg	4,7 mtr 3230 kg	6 mtr 2470 kg	7,3 mtr 1960 kg	8,6 mtr 1660 kg

17R Technische informatie
17R Technische Data
17R Information technique
17R Technical information





Maten / Abmessungen / Dimensions / Dimensions

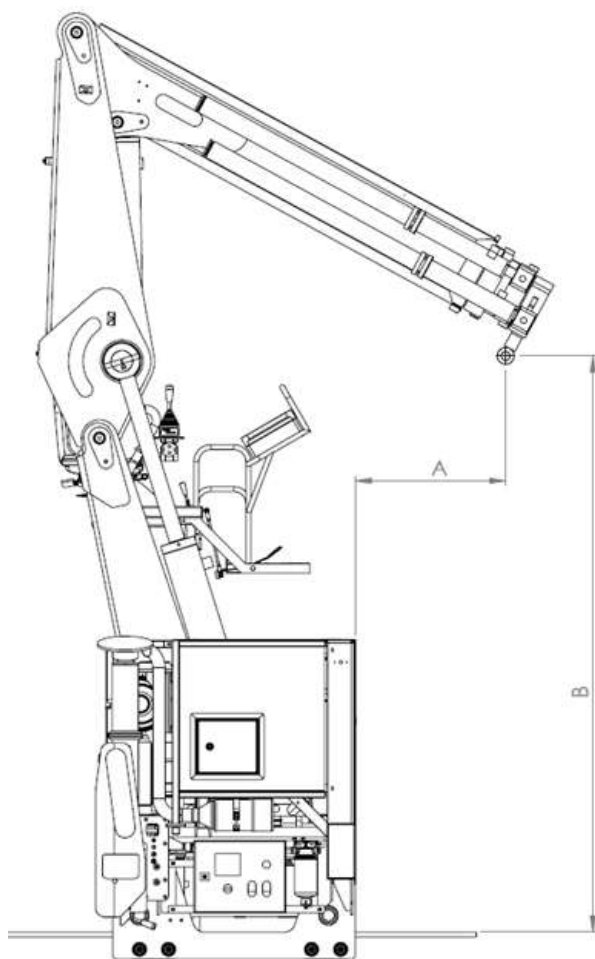

Type	A	B
KCS 17R-2X	550	2325
KCS 17R-3X	550	2330
KCS 17R-4X	565	2320

17R Technische informatie
17R Technische Data
17R Information technique
17R Technical information

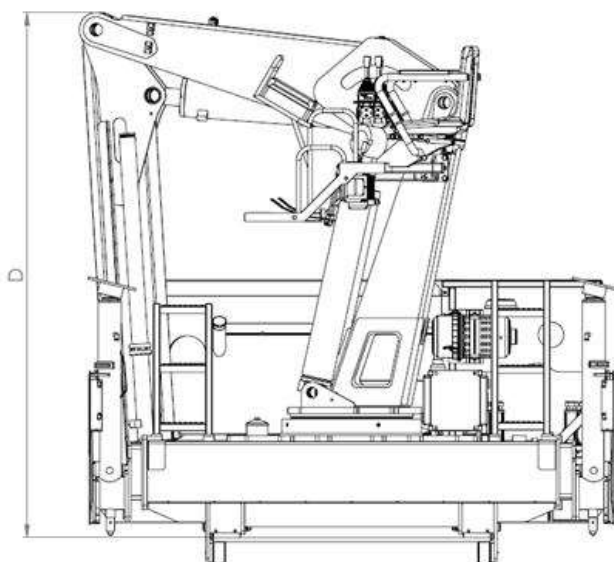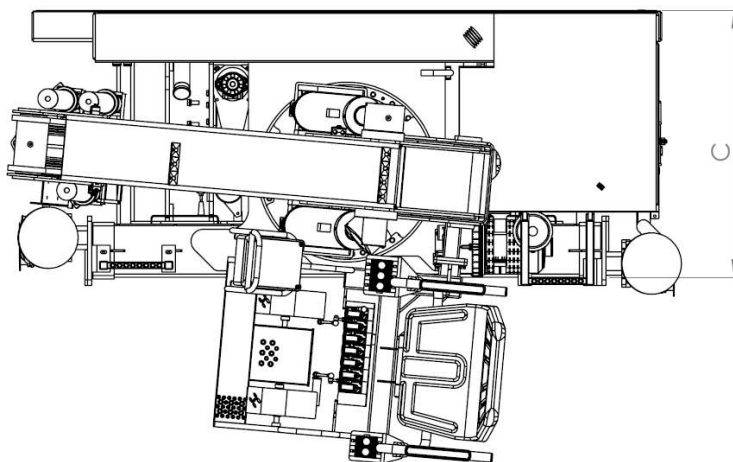

	KCS 17R-2X	KCS 17R-3X	KCS 17R-4X
C	1000 mm	1000 mm	1000 mm
D	2490 mm	2460 mm	2560 mm